




NBR 90 FKM 85

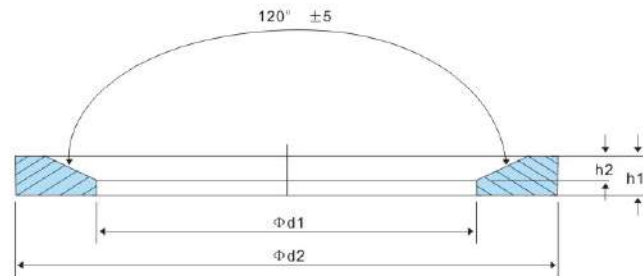


Size Specification

Number	Model	-	d1	d2	h1±0.1	h2
8	M8*1	-	6.50	9.90	1.00	0.50
10	M10*1	G1/8A	8.40	11.90	1.00	0.50
12	M12*1.5	-	9.80	14.40	1.50	0.80
14	M14*1.5	G1/4G	11.50	16.50	1.50	0.80
16	M16*1.5	-	13.80	18.90	1.50	0.80
17	-	G3/8A	14.70	18.90	1.50	0.80
18	M18*1.5	-	15.70	20.90	1.50	0.80
20	M20*1.5	-	17.80	22.90	1.50	0.80
21	-	G1/2A	18.50	23.90	1.50	0.80
22	M22*1.5	-	19.60	24.30	1.50	0.80
24	M24*1.5	G5/8A	21.80	26.90	1.50	0.80
27	M27*2	G3/4A	23.90	29.20	1.50	0.80
33	M33*2	-	29.70	35.70	2.00	1.00
42	M42*2	G1 1/4A	38.80	45.80	2.00	1.00
48	M48*2	G1 1/2A	44.70	50.70	2.00	1.00
60	M60*2	G2A	56.50	66.50	4.00	2.00



A BS/A automatic centering bonded seal is suitable for metric, inch, BSP threaded fittings and plug seal. It is an ideal accessory for quick and automated installation, which do not need special machining in seal groove position. The operating temperature range is from -30°C up to 100°C, and the working pressure shall within 39.2 mpa.

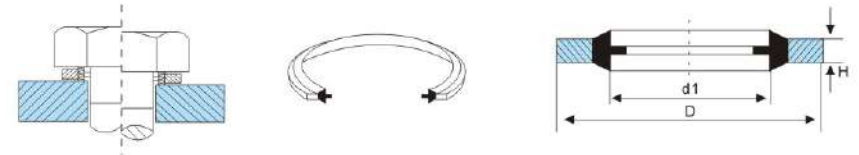

A non-automatic centering bonded seal is applied to the oil pipeline system for sealing welding fittings, card sets, expanding pipe fittings, pressure systems and mechanical devices plug to prevent oil, fuel, water and medicines leakage. The nominal pressure is 40mpa, and its operating temperature range is from -25°C up to 100°C.

